

Dimmable LED Driver—LKAD019D-T

—产品特性/Feature—

- 120VAC (50/60Hz) 输入 / 120VAC (50/60Hz) Input
- 隔离方案, 前切 (或后切) 可控硅调光, 调光非常流畅 / Isolated, leading (or trailing) triac dimming, dimming much smoothly;
- 高效率, 高功率因素, 高压绝缘4KV, 抗雷击>6KV (可升至10000V), 稳定性好, 无频闪 / High efficiency and PF, Hipot 4KV, Surge test >6KV (can be up to 10KV), good stability, non-flicker;
- 变压器铜丝F级, 耐高温155℃ (同行120℃) / The copper wire of transformer is Grade F, resist high-temperature 155℃ (usually 120℃);
- 短路保护, 过流保护, 过压保护, 过温保护 / short circuit/over load/over current/ over temperature protection;
- 100%满载老化测试 / 100% full load burn-in test;
- 防护等级 IP67 / Degree of protection IP67;
- 通过UL和FCC认证 / UL and FCC certification passed;
- 适用于面板灯/天花灯/筒灯等照明应用 / suitable for LED lighting, ceiling light, down light and panel light;
- 3年质保期 / 3 years warranty.



产品参数/Specification

Model	LKAD019D-T		
输入 Input	AC电压范围/AC Voltage range	120V	
	频率/Frequency	50/60hz	
	谐波/THD		
	功率因数/Power factor	0.98/120Vac	
输出 Output	额定电压/Rated voltage	40V	
	空载电压/No-load Voltage	46V	
	DC电压范围/DC voltage range	20-40V	
	DC电流范围/DC current range	300mA	
	电流精度/Current precision	(+/-)3%	
	额定功率/Rated power	15W	
	开机延时/Setup Time	≤0.5s/230VAC	
使用环境 Environment Requirements	工作温度/湿度要求 Operating Temp./RH	-30~+45℃/20~95%	
	储存温度, 湿度要求 Storage Temp./RH	-40~+80℃/10~95%	
安全和电磁兼容 容	认证编号/Certificate	UL:E478938	
		FCC:WTD14S0918347E	
其他	尺寸/Size		
	重量/Net weight		


测试数据/Test data

输入电压 Input voltage (Vac)	输入电流 Input current (mA)	输入功率 Input power (W)	功率因数 PF	输出电压 Output voltage (Vdc)	输出电流 Output current (mA)	输出功率 Output Power (W)	转换效率 Efficiency (%)	谐波系数 THD
120	68.77	8.00	0.981	20.00	331	6.62	82.8%	
	98.20	11.41	0.991	30.00	321	9.63	84.4%	
	127.40	14.74	0.995	40.00	312	12.48	84.7%	


调光测试效果Dimming effect

编号 NO	调光器型号 Dimmer NO	最小电流 Min current (mA)	最大电流 Max current (mA)	调光比 Dimming ratio	调光效果 Dimming effect
1	SIEMENS (220V~) (40-500W)	68.00	697	0-100	OK

产品尺寸图/ Product Size Diagram

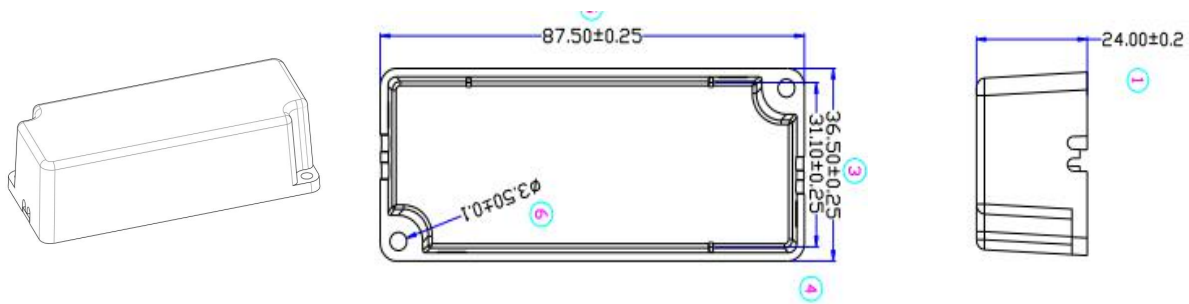

产品接线示意图/ Product Connection Diagram

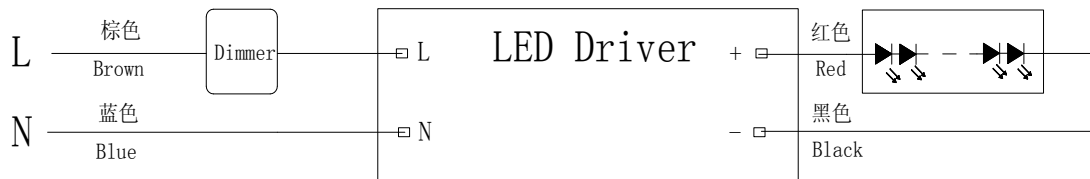

备注/Note:

1. 所有没提及到的参数都是在230V输入，额定负载和在周围温度为25°C的情况下测试的；
All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature;
2. 本驱动电源是作为一个部件与最终的设备结合进行操作的。因为EMC的性能在电源完全安装后会受到影响，因此最终设备制造商在完成安装后必须重新获取EMC指示认定。
The LED driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
3. 可以直接与LEDs连接，但不适宜与额外的驱动电源使用；
Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.
4. 为了满足在灯具安装中最后的ErP校准要求，本驱动电源只能在一个不是永久地连接在交流干线的开关后面使用。
To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connect to the mains.

广东领冠智能科技有限公司
司

地 址：广东省东莞市万江区大莲塘工业区3号
Address: NO.3 Building, Daliantang Industrial Park,
Wanjiang District, Dongguan, Guangdong, China
Tel:+86-769-23129651 Fax:+86-23129652