



領冠電源

0-10V Dimmable LED Drivers—LKAD029D



—产品特性/Feature—

- 120-277VAC (50/60Hz) 输入 / 120-277VAC (50/60Hz) Input
- 隔离高PF无频闪方案,。采用最新的调光信号与主输出的隔离调光认证方案 No stroboscopic scheme for high PF isolation, . Using the latest dimming signal and main output isolation dimming certification scheme
- 高效率、高功率因素, 高稳定性, 高调光比 high efficiency, high power factor, high stability, high light ratio
- 短路保护, 过流保护, 过压保护, 过温保护 / Short circuit, over voltage, over current and over temperature protection;
- 独立外置, Class II 恒流类型 / independent, Class II constant current type;
- 防护等级 IP65 / degree of protection IP65;
- 实现了真正的0-10V调光, 全程无频闪, 兼容市场上所有的调光控制系统。 It realizes true 0-10V dimming, no flicker in the whole process, and is compatible with all dimming control systems in the market.
- 3年质保期 / 3 years warranty.



产品参数/Specification

Model		LKAD029D-C	备注
输入 Input	输入电压范围/Input Voltage range	120-277V	
	频率/Frequency	50/60hz	
	谐波/THD	≤15%	
	功率因数/Power factor	0.95/240VAC	
	输入电流 Input current (mA)	420MA/120VAC	
	待机功耗 stand_by power	≤0.8W	
	浪涌电流 Inrush Current (Max.)	≤30A@230VAC	
	漏电流 Leakage Current	<1MA/240VAC	
输出 Output	额定电压/Rated voltage	55V	
	空载电压/No-load Voltage	60V	
	工作电压范围/working voltage range	20-55V	
	可选择电流规格/selectable current	300-750MA	
	电流精度/Current precision	(+/-) 3%	
	额定功率/Rated power	42W	
	开机延时/Setup Time	≤0.5s/230VAC	
	输出线性调整率Output Line Regulation	±5%	
	温度漂移temperature drift	±10%	

保护特性	开路保护Output open circuit p	有/Enable	
	短路保护Short Circuit Protect	打嗝模式/Hiccup mode	
使用环境 Environment Requirement	工作温度/湿度要求 Operating Temp./RH	-30~+45°C/20~95%	
	储存温度,湿度要求 Storage Temp./RH	-40~+80°C/10~95%	
安全和电磁 兼容 Safety & EMC	认证编号/Certificate	E478938	
	耐压 withstand voltage	1500VAC/60S	
	绝缘阻抗insulation resistance	500V>100M	
	浪涌等级EMS immunity	IEC6100-4-5(L-N:1KV)	
	安规标准Safety standard	IEC61347-2-13 EN6147-2-13	
	电磁干扰electromagnetic inter	EN55015	
	电磁抗干扰Electromagnetic Sus	Fcc Part15B	
其他 Others	IP等级说明 IP level descripti	IP20	
	质保说明Warranty instructions	3年/3 years	
	尺寸/Size	L165xW47xH36mm	
	重量/Netweight	100g	
注意事项 matters needing attention	<p>1. 建议客户在灯具供电回路中安装过欠压保护与浪涌保护装置, 以确保用电安全 1.pls suggest the client to instal the unde voltage protection device and surge protection device to ensure Electricity safety</p> <p>2. 电源作为整灯灯具中的一个零部件与终端设备结合使用, 因EMC性能受LED灯具及走线的影响, 终端设备制造商需对整套装置重新进行EMC确认。 2.The power supply is considered a component which will be installed a final equipment.The final equipment must be re-confirmed that it still meets EMC directives.</p> <p>3. 客户在使用电源时, 注意电源通风散热和环境温度, 超过TA时要做降额使用 3.Becareful of ambient temperature and heat dissipation during the client use this unit, When exceeding TA, the power supply shall be derated</p>		


测试数据/Test data

输入电压 Input voltage (Vac)	输入电流 Input current (mA)	输入功率 Input power (W)	功率因数 PF	输出电压 Output voltage (Vdc)	输出电流 Output current (mA)	输出功率 Output Power (W)	转换效率 Efficiency (%)
120V	392.80	47.43	0.994	55.00	752	41.36	87%
	287.30	34.73	0.992	40.00	749	29.96	86%
	146.90	17.51	0.982	20.00	737	14.74	84%
200V	230.30	45.85	0.979	55.00	745	40.98	89%
	170.80	33.67	0.969	40.00	744	29.76	88%
	94.16	17.66	0.921	20.00	744	14.88	84%
240V	197.70	45.92	0.966	55.00	747	41.09	89%
	148.20	33.75	0.947	40.00	746	29.84	88%
	86.20	17.77	0.872	20.00	745	14.90	84%


277V	174.40	45.80	0.948	55.00	745	40.98	89%
	132.50	33.76	0.919	40.00	744	29.76	88%
	78.32	17.87	0.822	20.00	744	14.88	83%

调光测试数据 Dimming test data

输入电压 Input voltage	输入电流 Input current	输入功率 Input power (W)	功率因数 PF	输出电压 Output voltage	输出电流 Output current (A)	输出功率 Output Power	调光电压 Dimming voltage (V)	百公比	
120V	10.50	0.58	0.446	55.000	0.00	0.00	0V	0.00%	0
120V	82.90	6.49	0.644	55.000	95.00	5.23	0.5V	12.79%	1
120V	115.20	9.4	0.982	55.000	142.00	7.81	1V	19.11%	2
120V	137.20	16.45	0.982	55.000	258.00	14.19	2V	34.72%	3
120V	169.50	20.44	0.987	55.000	322.00	17.71	3V	43.34%	4
120V	202.30	24.68	0.990	55.000	387.00	21.29	4V	52.09%	5
120V	234.90	28.68	0.992	55.000	450.00	24.75	5V	60.57%	6
120V	267.80	32.68	0.992	55.000	515.00	28.33	6V	69.31%	7
120V	301.40	36.77	0.992	55.000	580.00	31.90	7V	78.06%	8
120V	335.40	40.94	0.992	55.000	646.00	35.53	8V	86.94%	9
120V	365.70	44.63	0.992	55.000	703.00	38.67	9V	94.62%	10
120V	388.4	47.33	0.992	55.000	743	40.87	10V	100.00%	11

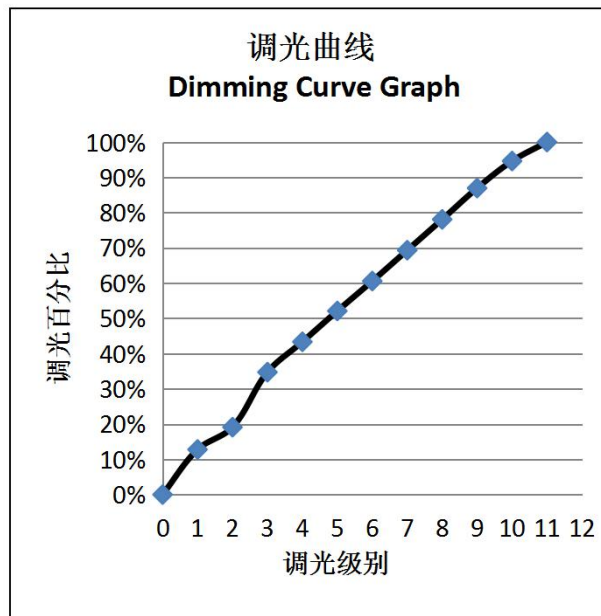

产品尺寸图/ Product Size Diagram

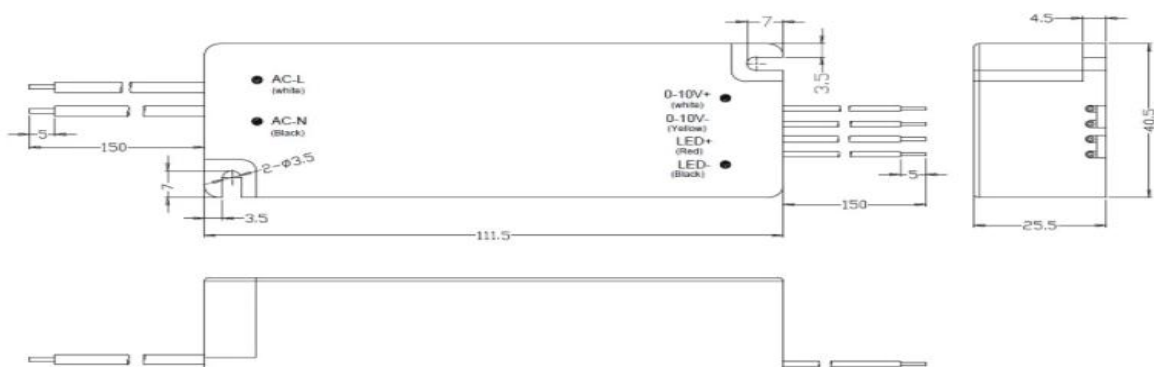



备注/Note:

- "1. 所有没提及到的参数都是在230V输入，额定负载和在周围温度为25°C的情况下测试的；
All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature;
- 2.注意接线的方向，不要搞反输入和输出端，
Pay attention to the direction of wiring, do not reverse the input and output terminals,

广东领冠智能科技有限公司

Dongguan Linkuan Semiconductor Lighting

地 址：广东省东莞市万江区大莲塘工业区3号
Address: NO.3 Building, Daliantang Industrial Park,
Wanjiang

District, Dongguan, Guangdong, China

Tel: +86-769-23129651

Fax: +86-23129652